




2W C-Band Block Up-Converter

Neo BUC™ Series are ideal for Broadband VSAT RF terminal.

- 33dBm min. output power
- Supreme Quality
- Small Size & Mass
- Low DC Power Consumption
- Two year Warranty

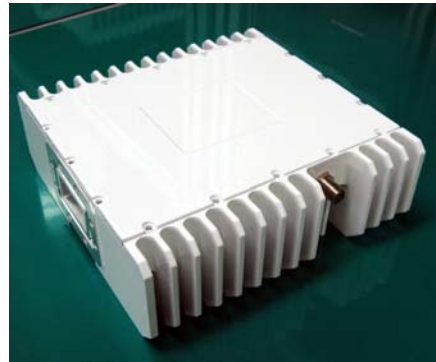


Model

Model Number	Description	RF Band (GHz)	IF Band (MHz)	Output Power (dBm)
TA33-LPF	2W C-band BUC, Std, F/N	5.85 – 6.425	950 - 1525	+33

Reference

External Reference	Performance
Input Frequency	10MHz
Impedance	75ohm
Input Power	-5 to +5dBm@ Input port
Phase Noise	-125 dBc/Hz @ 100Hz offset -140 dBc/Hz @ 1kHz offset -150 dBc/Hz @ 10kHz offset

Mechanical Drawing

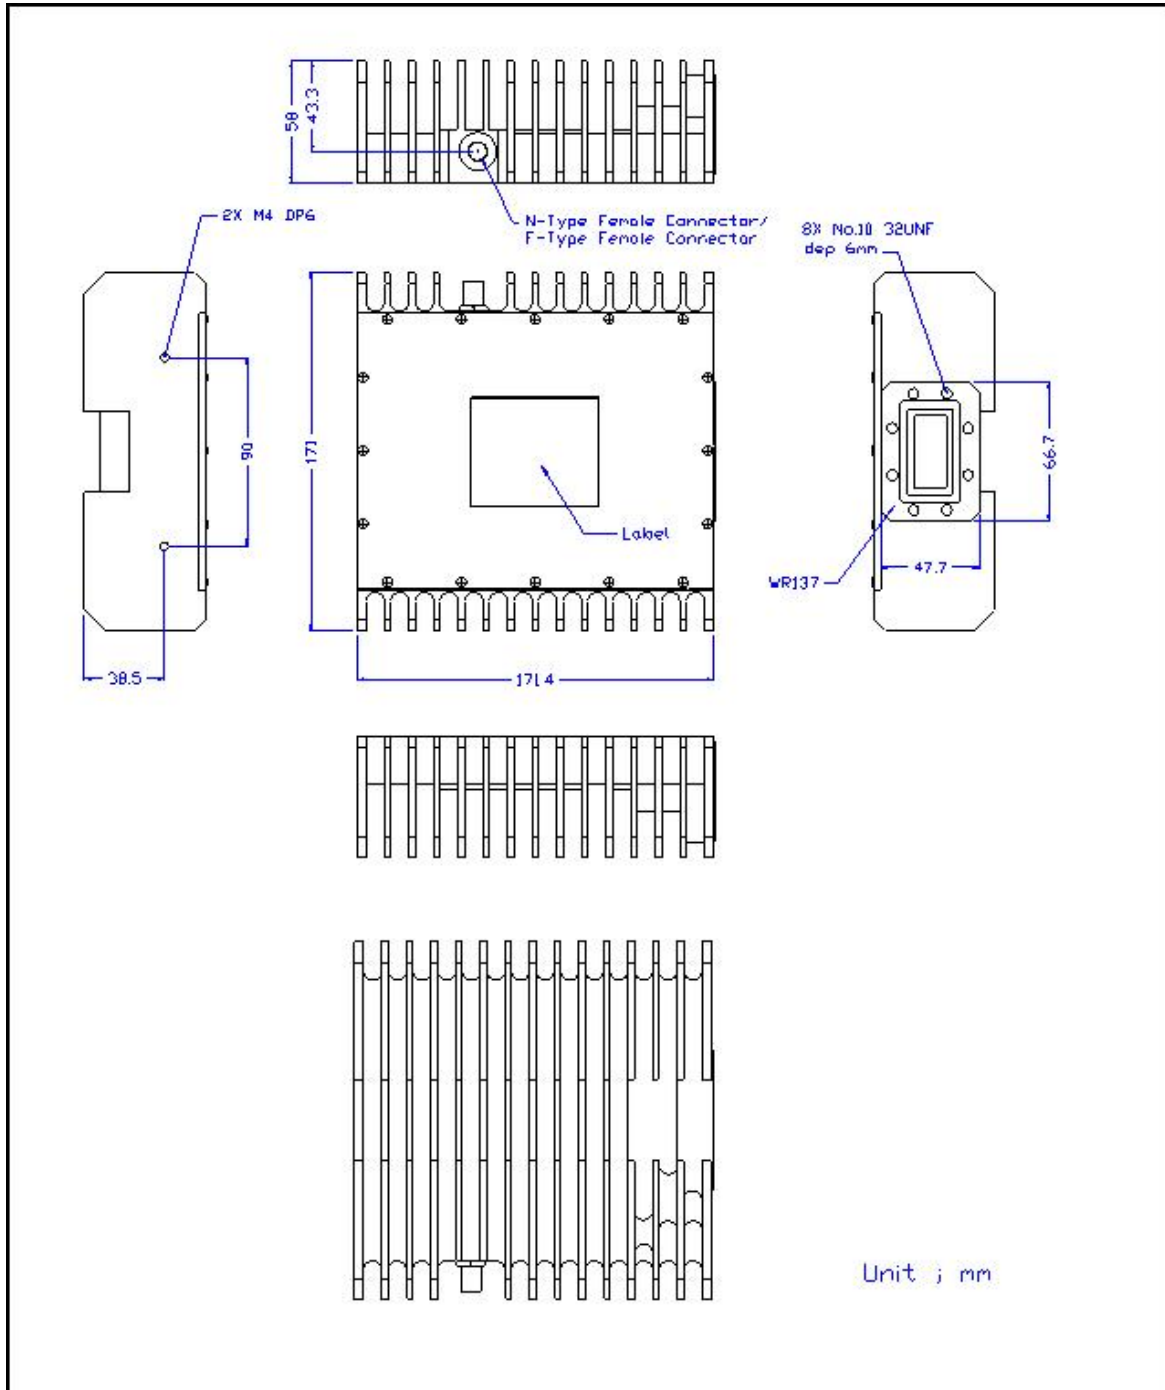



C Band InSat 2W BUC

Model Number : _____

Model Name : C InSat 2W BUC

Serial No. : _____

2-Mar-07

page 1/1

No	Parameter	Unit	Specifications	Comments	
Input Characteristics					
1	Frequency Range	MHz	1100 ~ 1400		
2	Impedance F / N Connector	Ohms	75 / 50		
3	Return Loss	dB	>9.5	VSWR 2 : 1	
4	Interface		F(f) / N(f)		
Output Characteristics					
5	Frequency Range	GHz	6.725 ~ 7.025		
6	Output Power @ 1dB G.C.P	dBm	>=33	@ Worst Case	
7	Return Loss	dB	>9.5	VSWR 2 : 1	
8	Interface		CPR137G	PR137G	
Transfer Characteristics					
9	Frequency Sense		Non-Inverted	LO Freq. = 5.625GHz	
10	Linear Gain	Min.	dB	≥50	Typ. 55dB
		Max.	dB	≤60	
11	Gain Variation				
	Over 50 MHz	dB	1.5		
	Over 300 MHz	dB	3.0		
12	Spurious In Band (320KHz)	dBc	<= -50		
	In Band (Full Span)	dBm	<= -23		
	Out of Band (3GHz Span)	dBm	<= -45		
13	RF Off Tx Enabled	dBm/Hz	<= -45		
14	Worst Case LO Leakage(@4.9GHz)	dBm	<= -45		
15	Phase Noise 10Hz	dBc/Hz		Ext. Reference Phase Noise (100Hz/1KHz/10KHz/100KHz) -125 / -140 / -150 /-150 dBc/Hz	
	100Hz		-60		
	1KHz		-70		
	10KHz		-80		
	100KHz		-90		
	1MHz				
Miscellaneous					
16	Operating Voltage	Vdc	15~24		
17	Power Consumption	W	<= 30		
18	Start All Temperatures	Pass / Fail			
	Ext. Ref. Power Level	dBm	-5 ± +5	@10MHz	
19	Operating Temperature	degree C	-40 ~ +55		
20	Humidity	100% Condensing			
21	Internal Function	Lock Detector shuts off Tx in case of unlock			
22	Dimension (L X W X H mm)	172 X 171 X 58			
23	Weight	Kg	< 2		

*** Specifications are subject to change without notice**



Quality Assurance

**NexGenWave products are manufactured under ISO9001:
2000 quality certified facility**



NexGenWave, INC

Sicox Tower #621 Sangdaewon 513-14

Sungnam Kyonggi 462-121 Korea

Tel: +82-31-777-9912 Fax: +82-31-777-9916

www.nexgenwave.com